
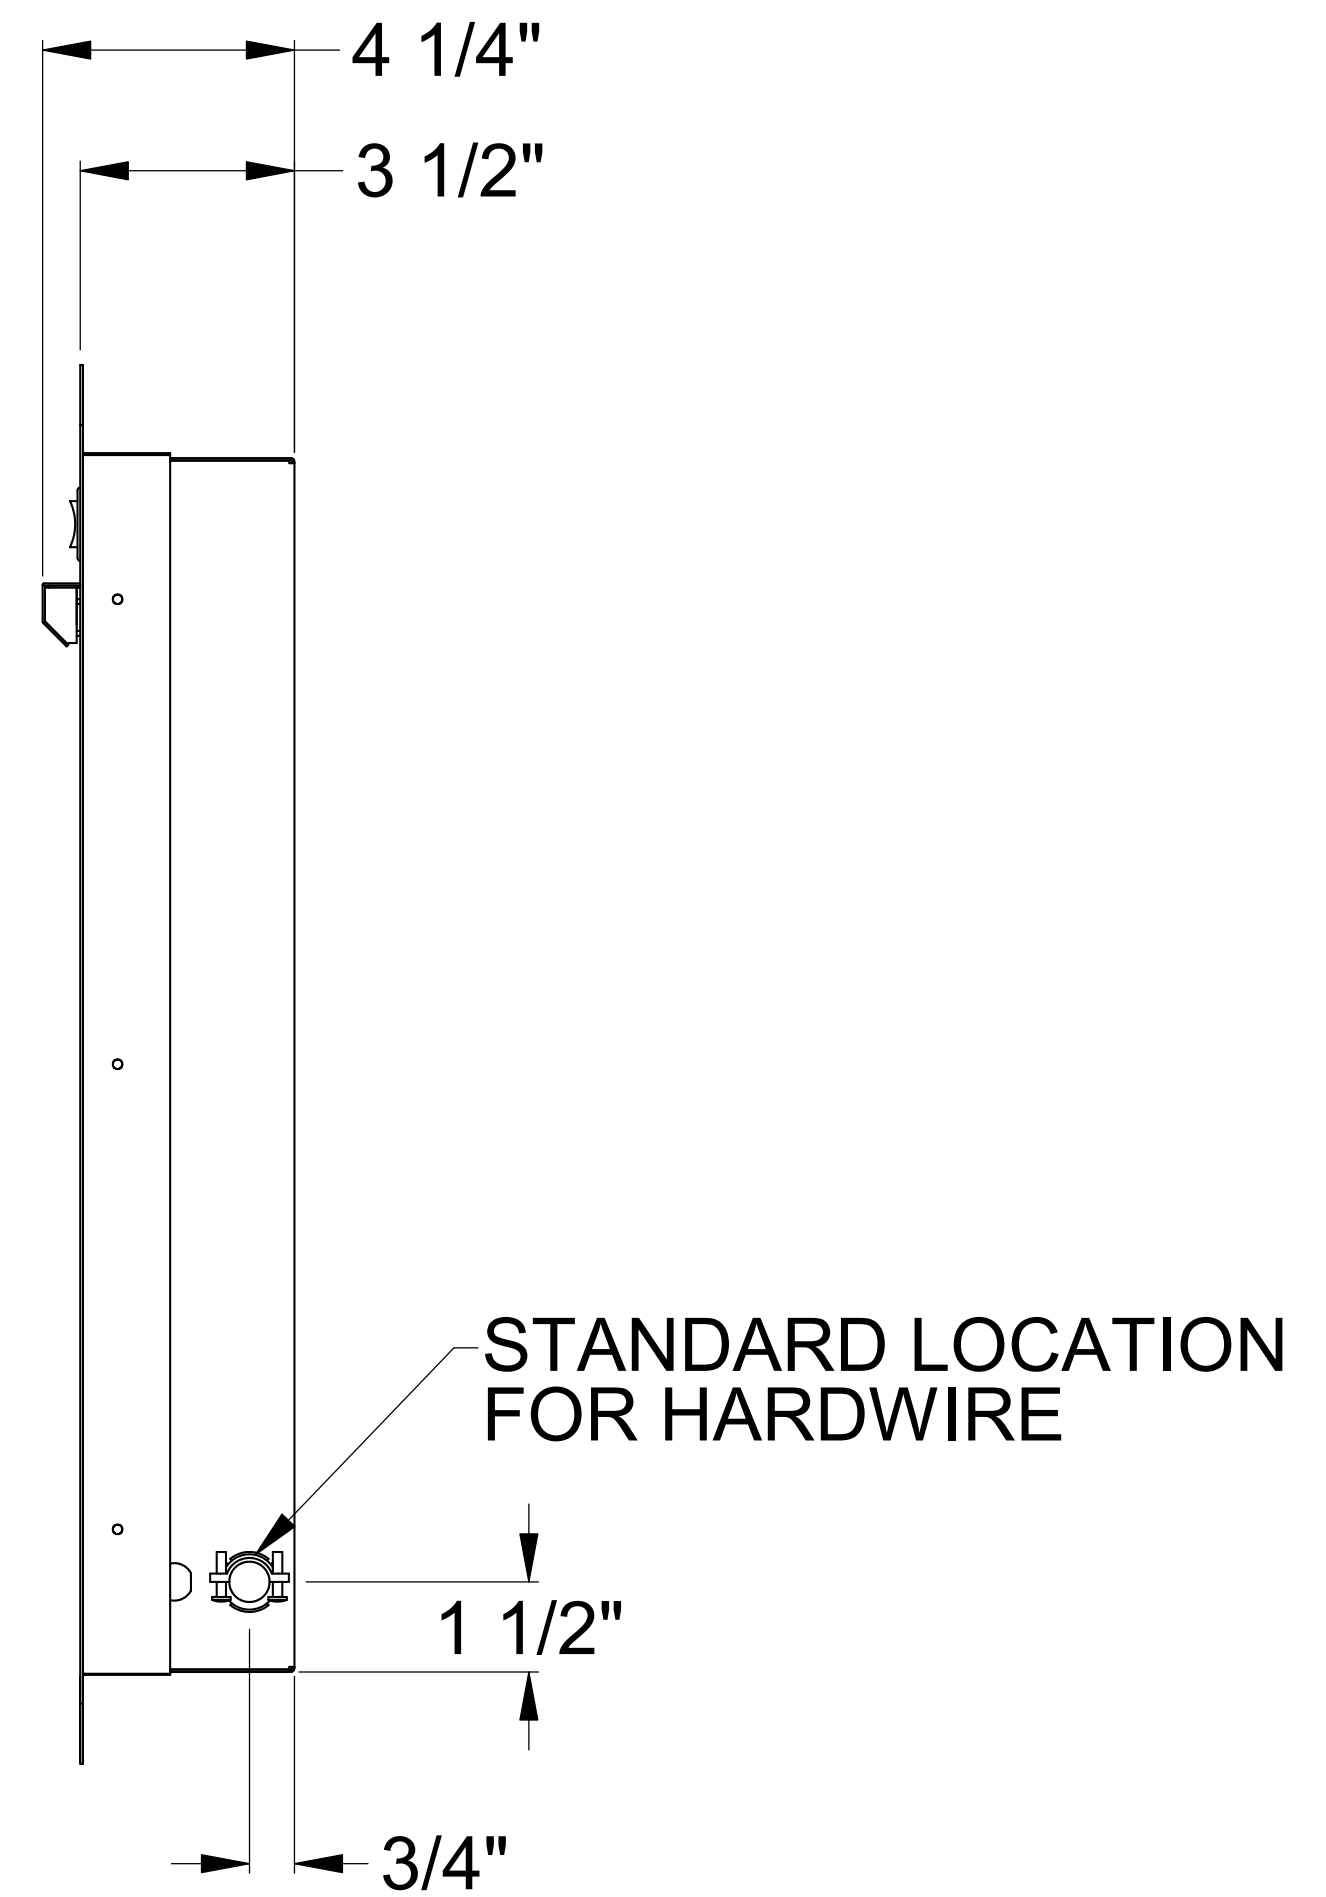


# 1 Tier, 2 Bank Recessed Units (2002R thru 4002R Series)

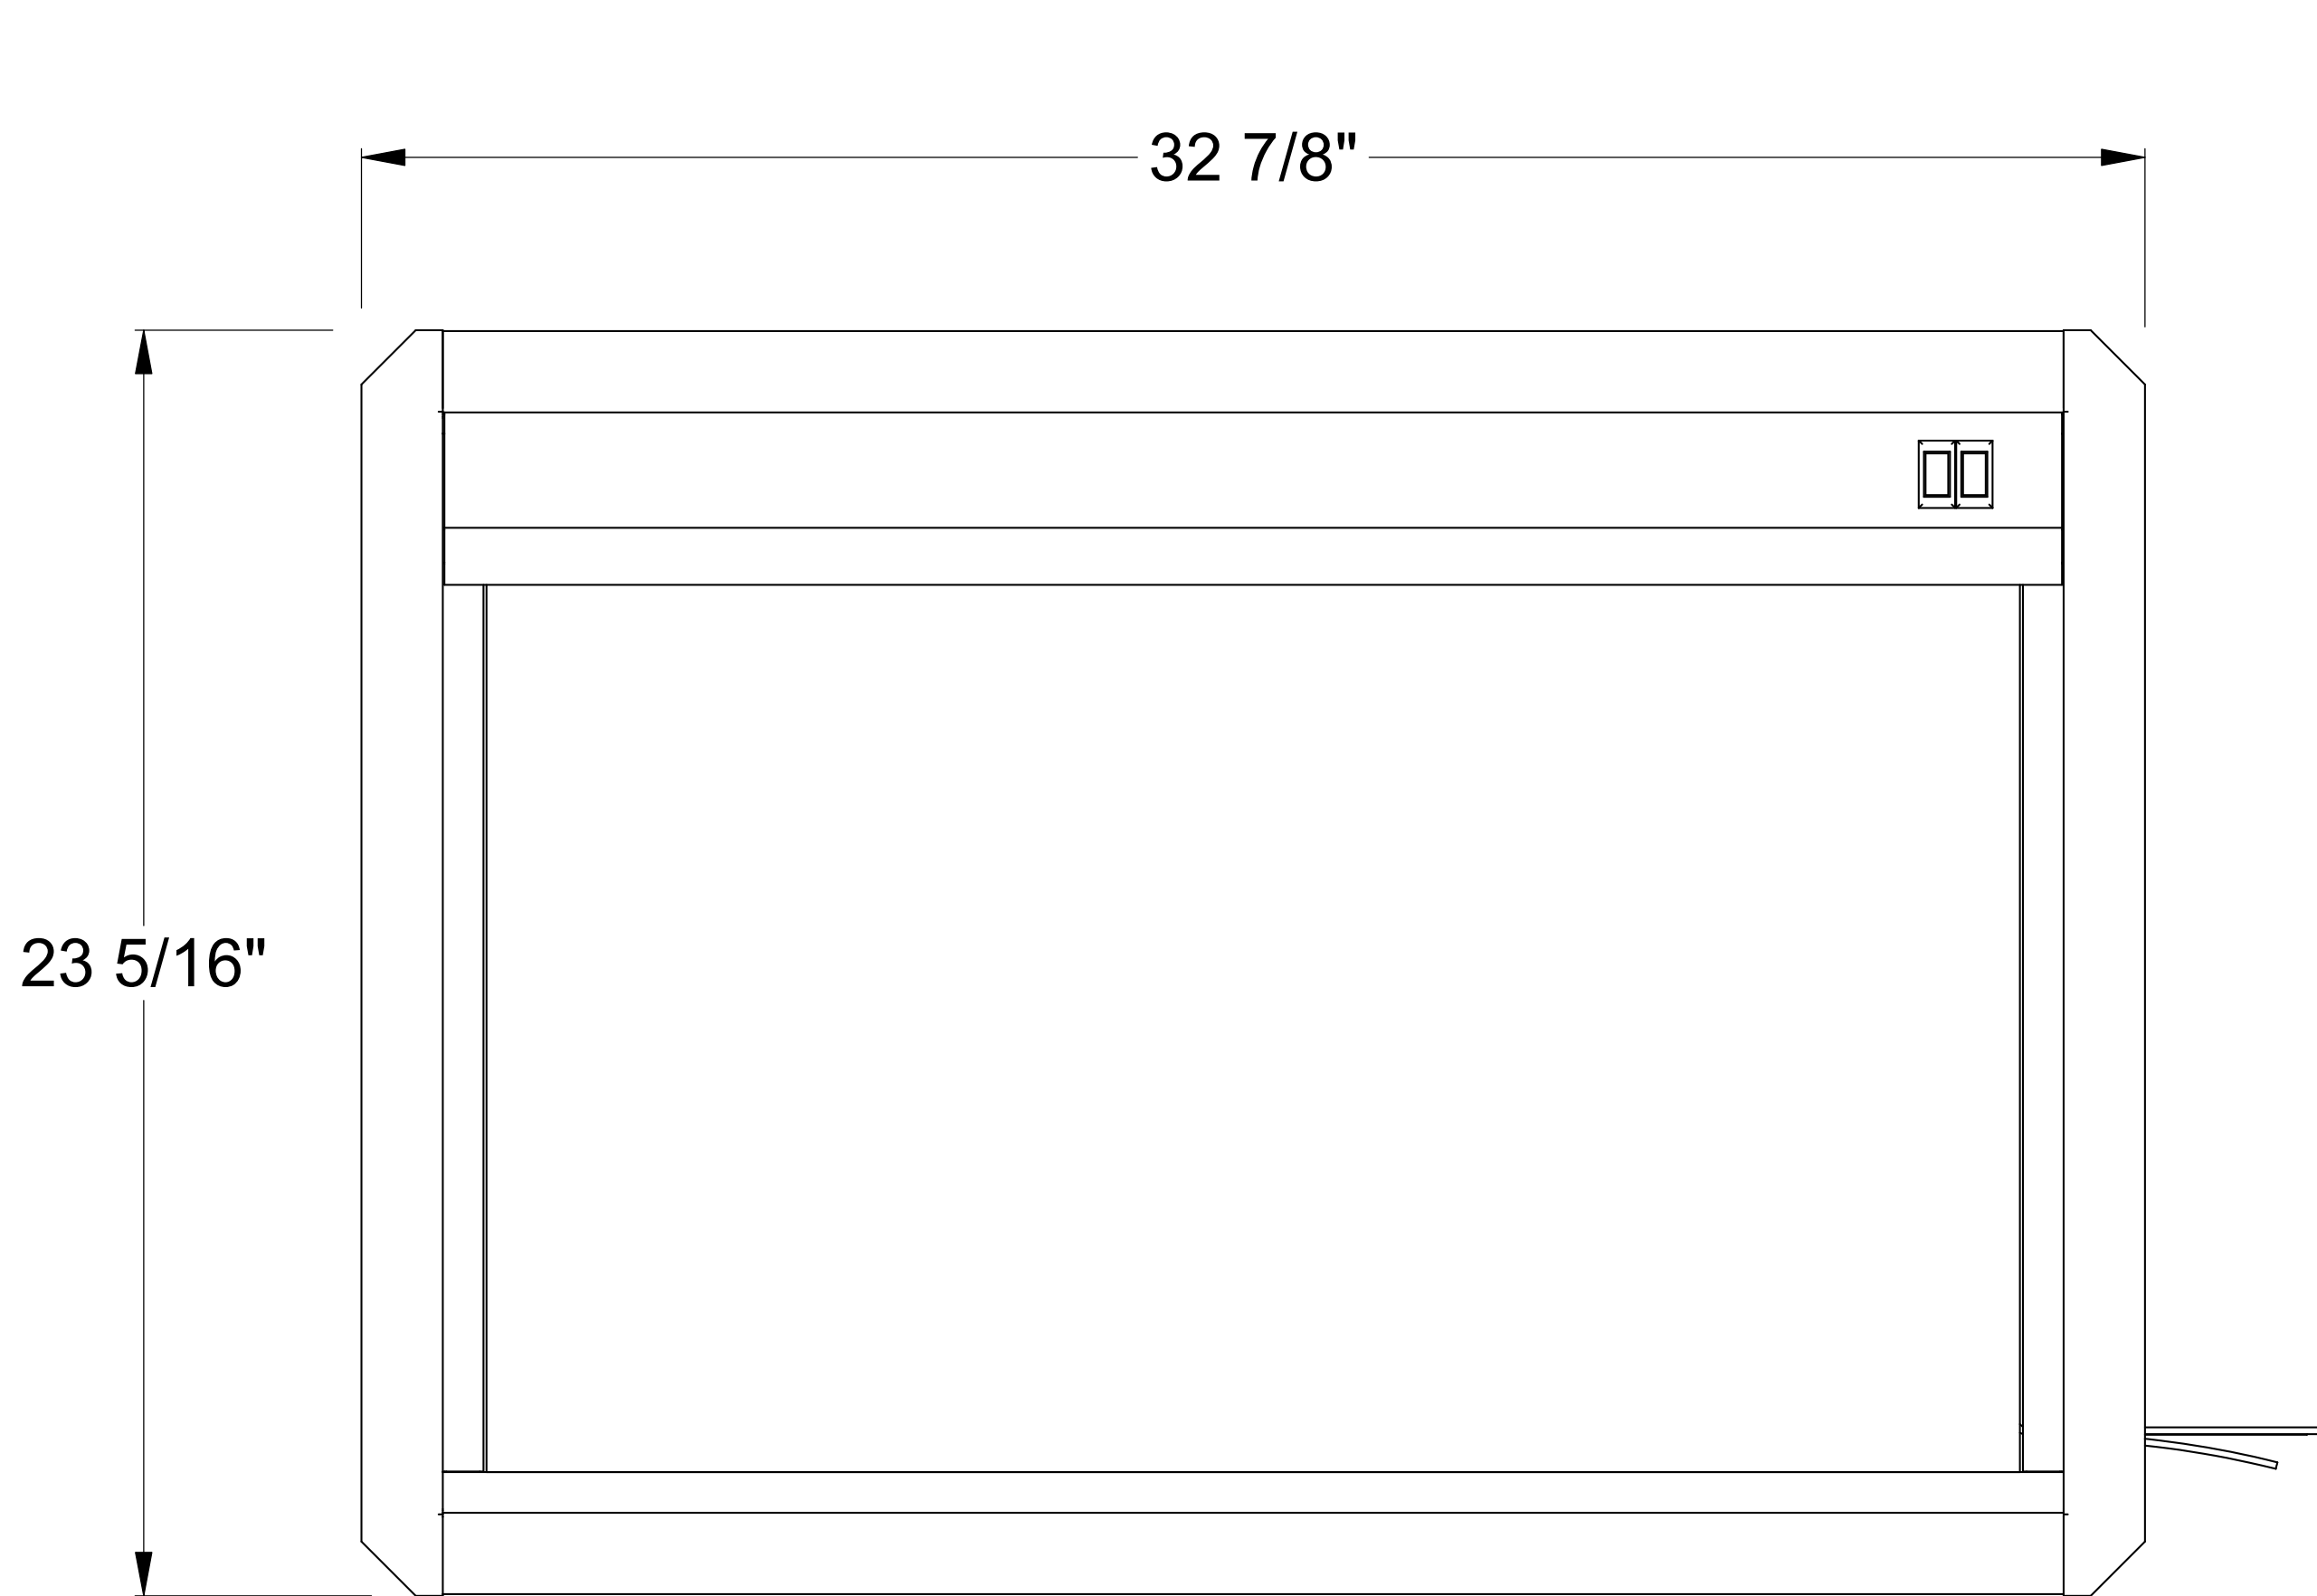

Electrical Requirements: 120VAC, 60 Hertz, Single Phase  
Power Rating: 2.4A  
Rough Opening Dimensions: 21" x 30  $\frac{5}{8}$ "

 **UL** us UL/CUL Approved  
LISTED