



# 1 Tier, 5 Bank Recessed Units (2005R thru 4005R Series)

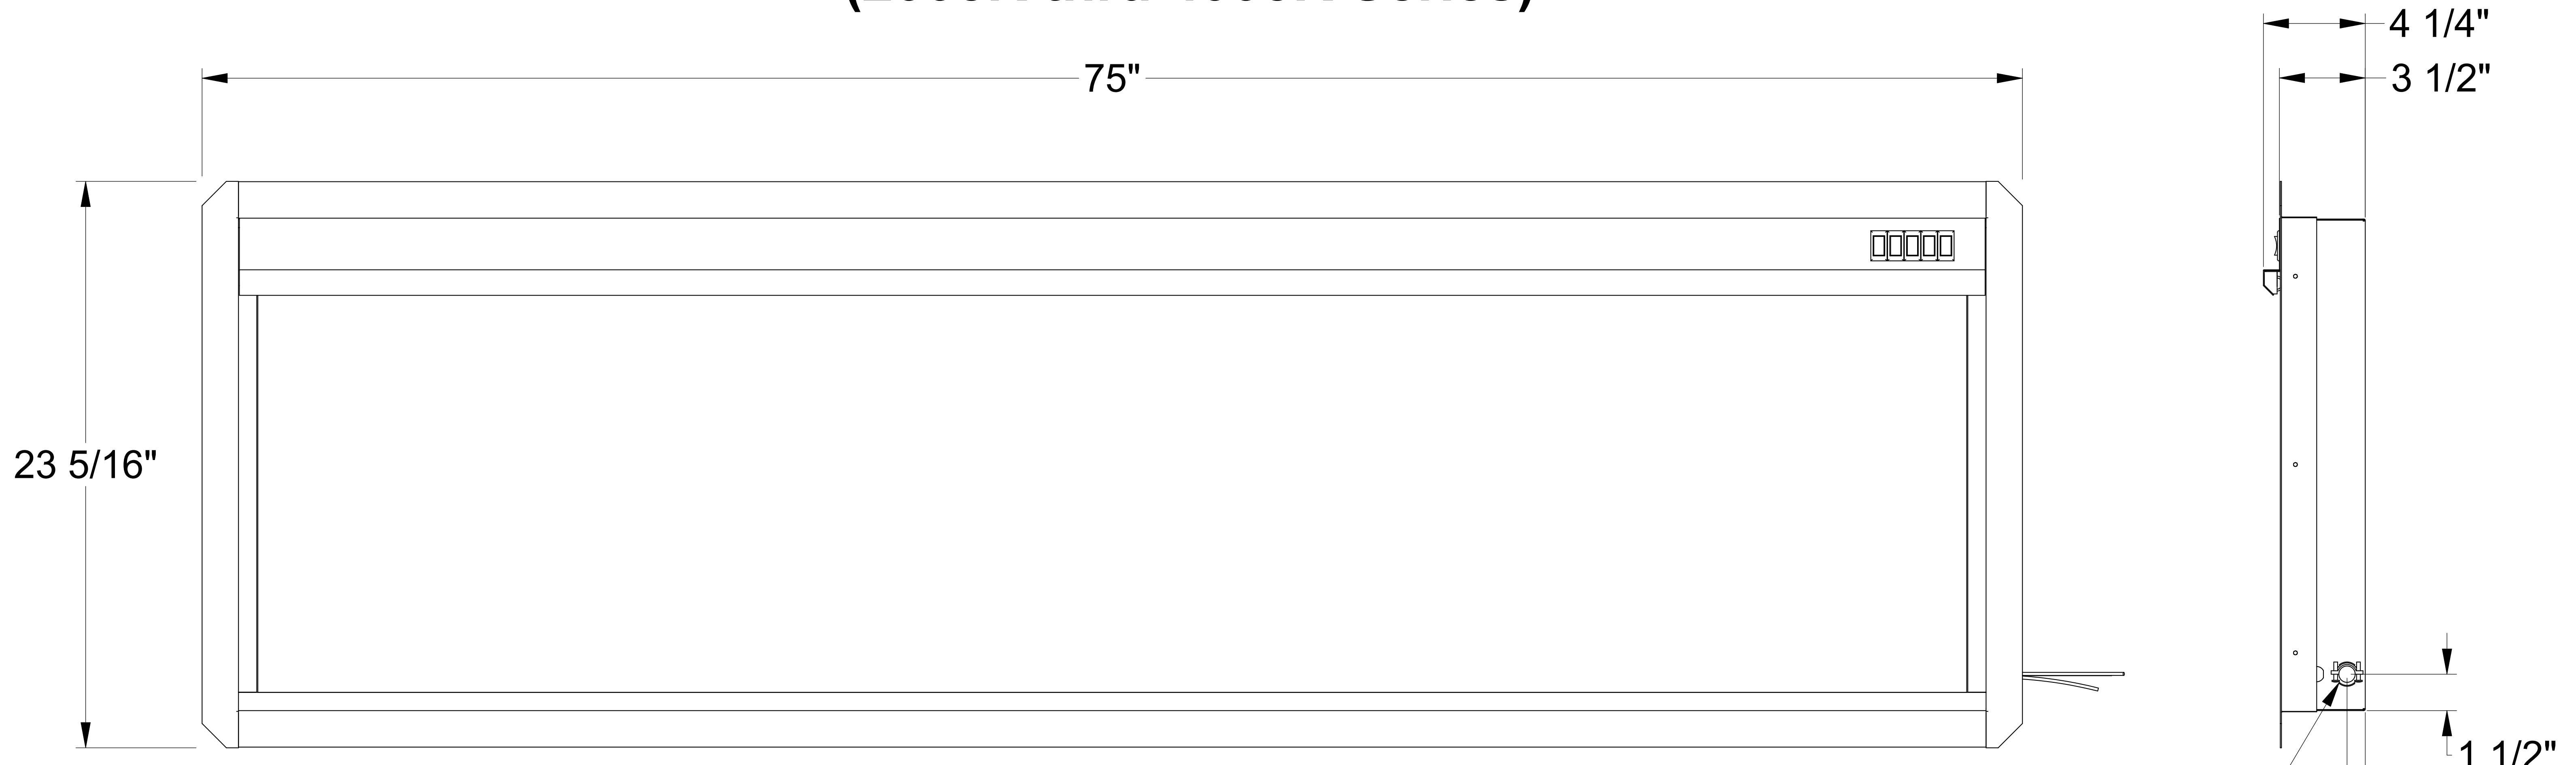

Electrical Requirements: 120VAC, 60 Hertz, Single Phase  
Power Rating: 6A  
Rough Opening Dimensions: 21" x 72 3/4"

c  us UL/CUL Approved  
LISTED

STANDARD LOCATION  
FOR HARDWIRE