



# 1 Tier, 6 Bank Recessed Units (2006R thru 4006R Series)

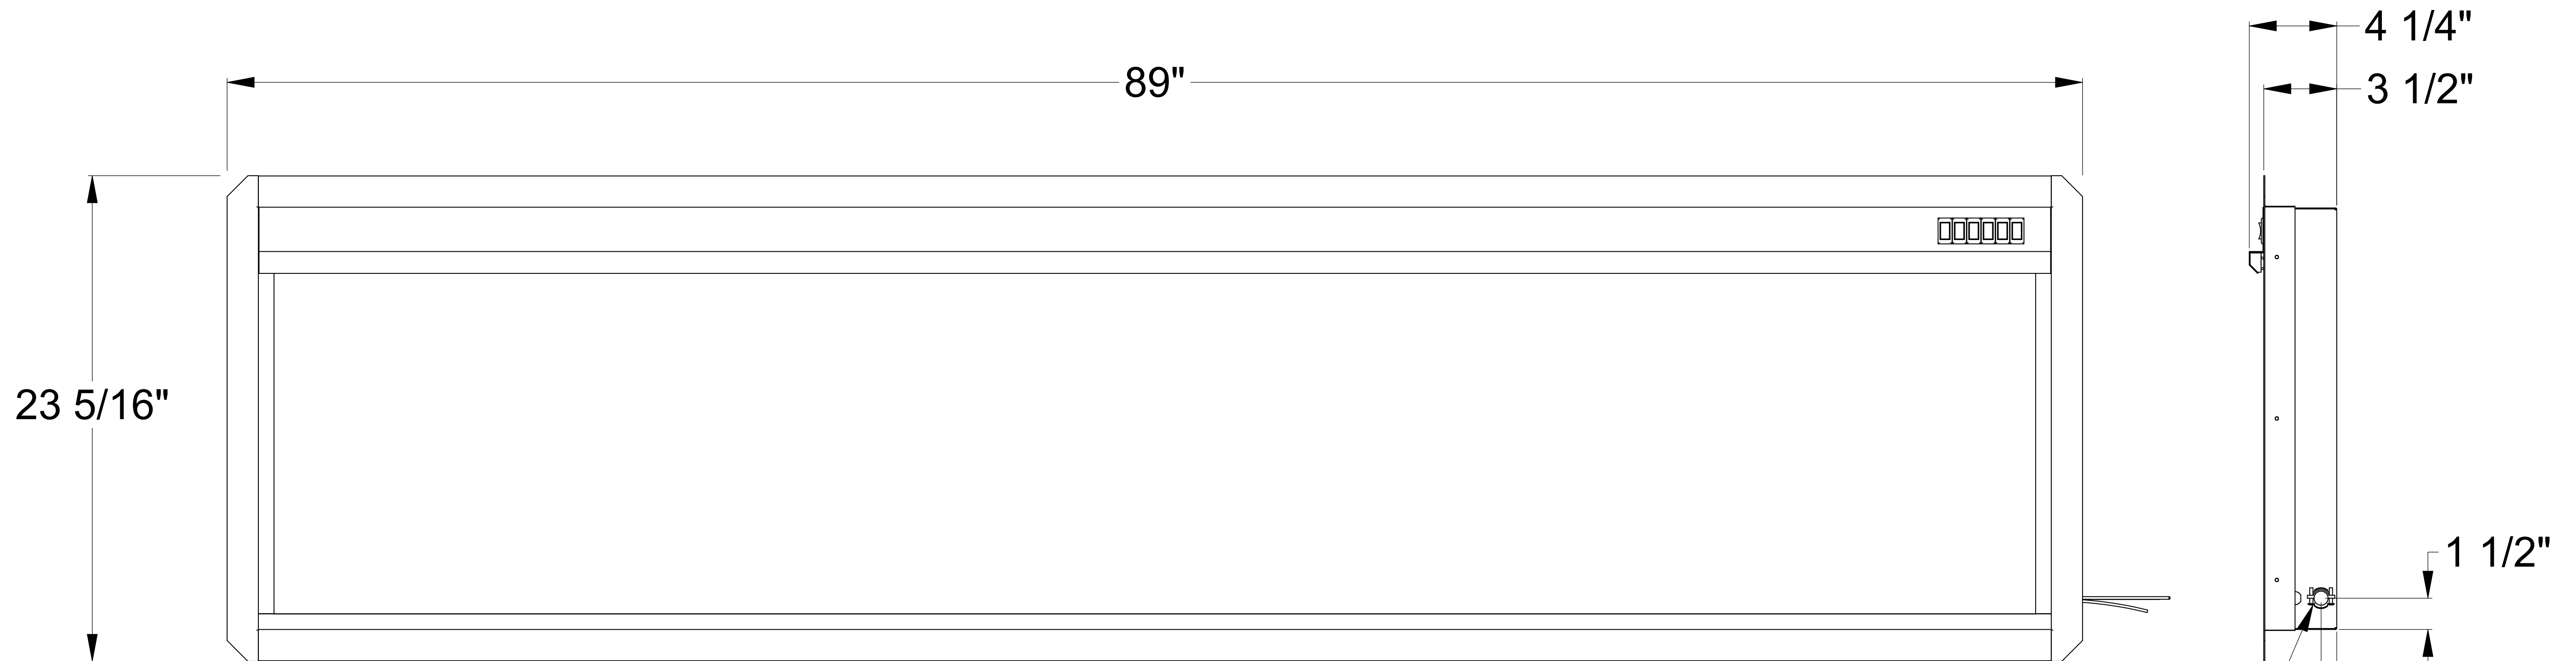

Electrical Requirements: 120VAC, 60 Hertz, Single Phase  
Power Rating: 7.2A  
Rough Opening Dimensions: 21" x 86 3/4"

STANDARD LOCATION  
FOR HARDWIRE

 **UL** us LISTED UL/CUL Approved