



2 Tier, 4 Bank Recessed Units (2044R thru 4044R Series)

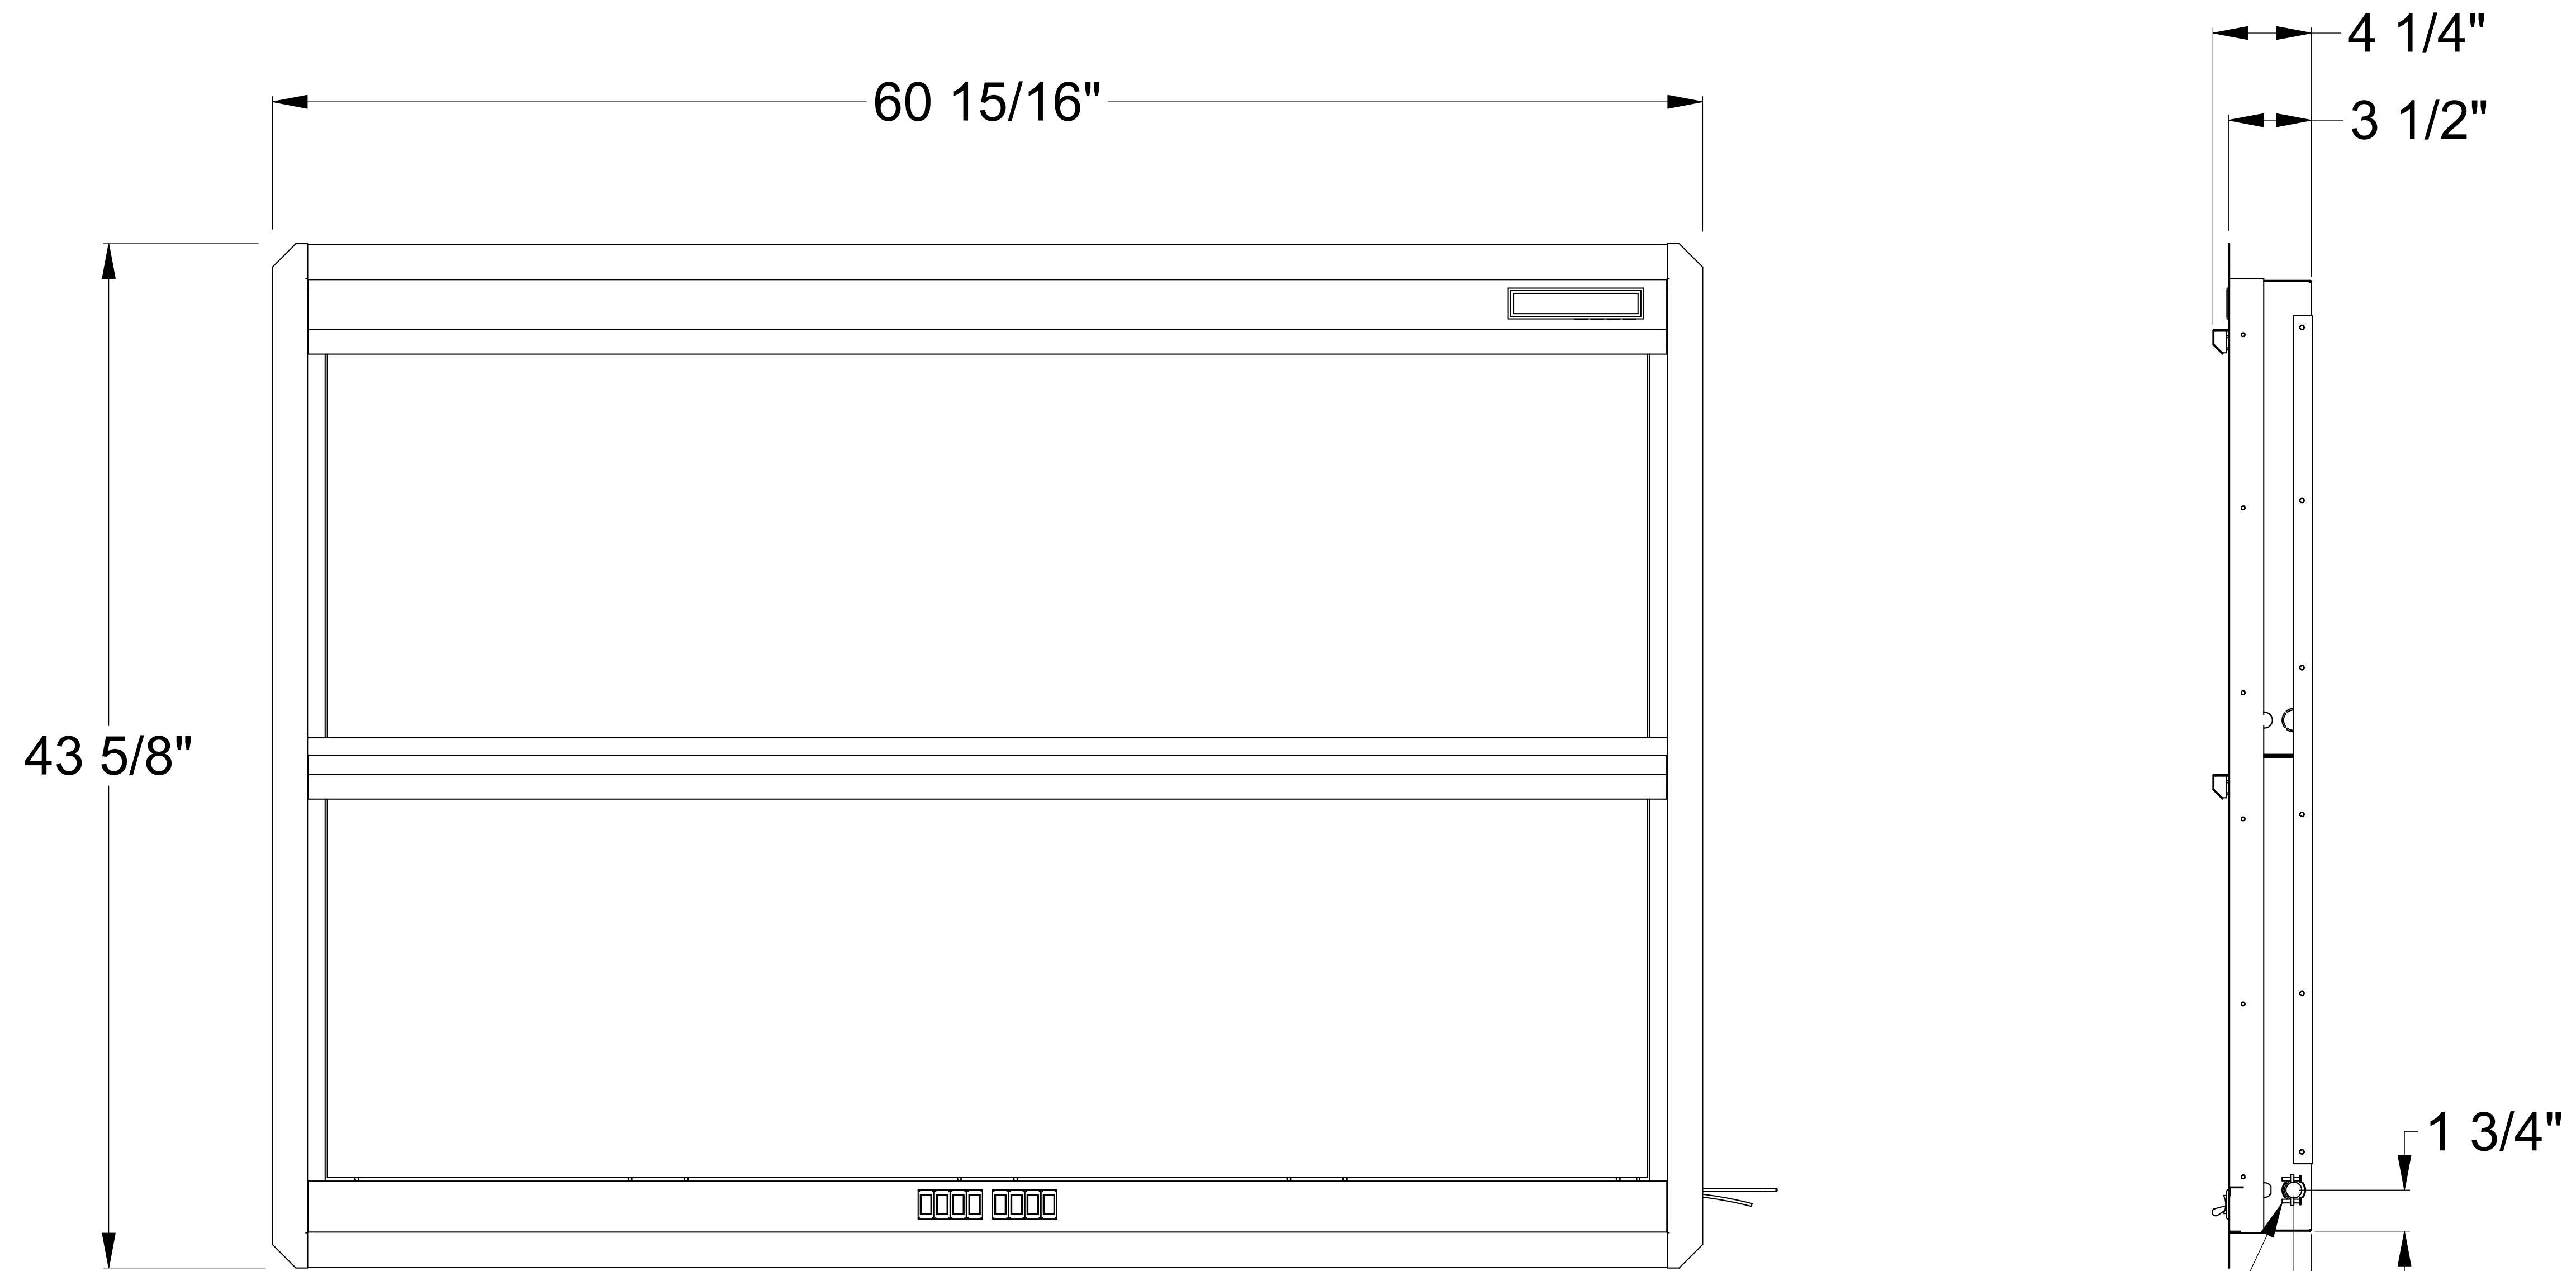

Electrical Requirements: 120VAC, 60 Hertz, Single Phase
Power Rating: 9.6A
Rough Opening Dimensions: 41 1/4" x 58 3/4"

 **UL** us UL/CUL Approved
LISTED

STANDARD LOCATION
FOR HARDWIRE