



2 Tier, 5 Bank Recessed Units (2055R thru 4055R Series)

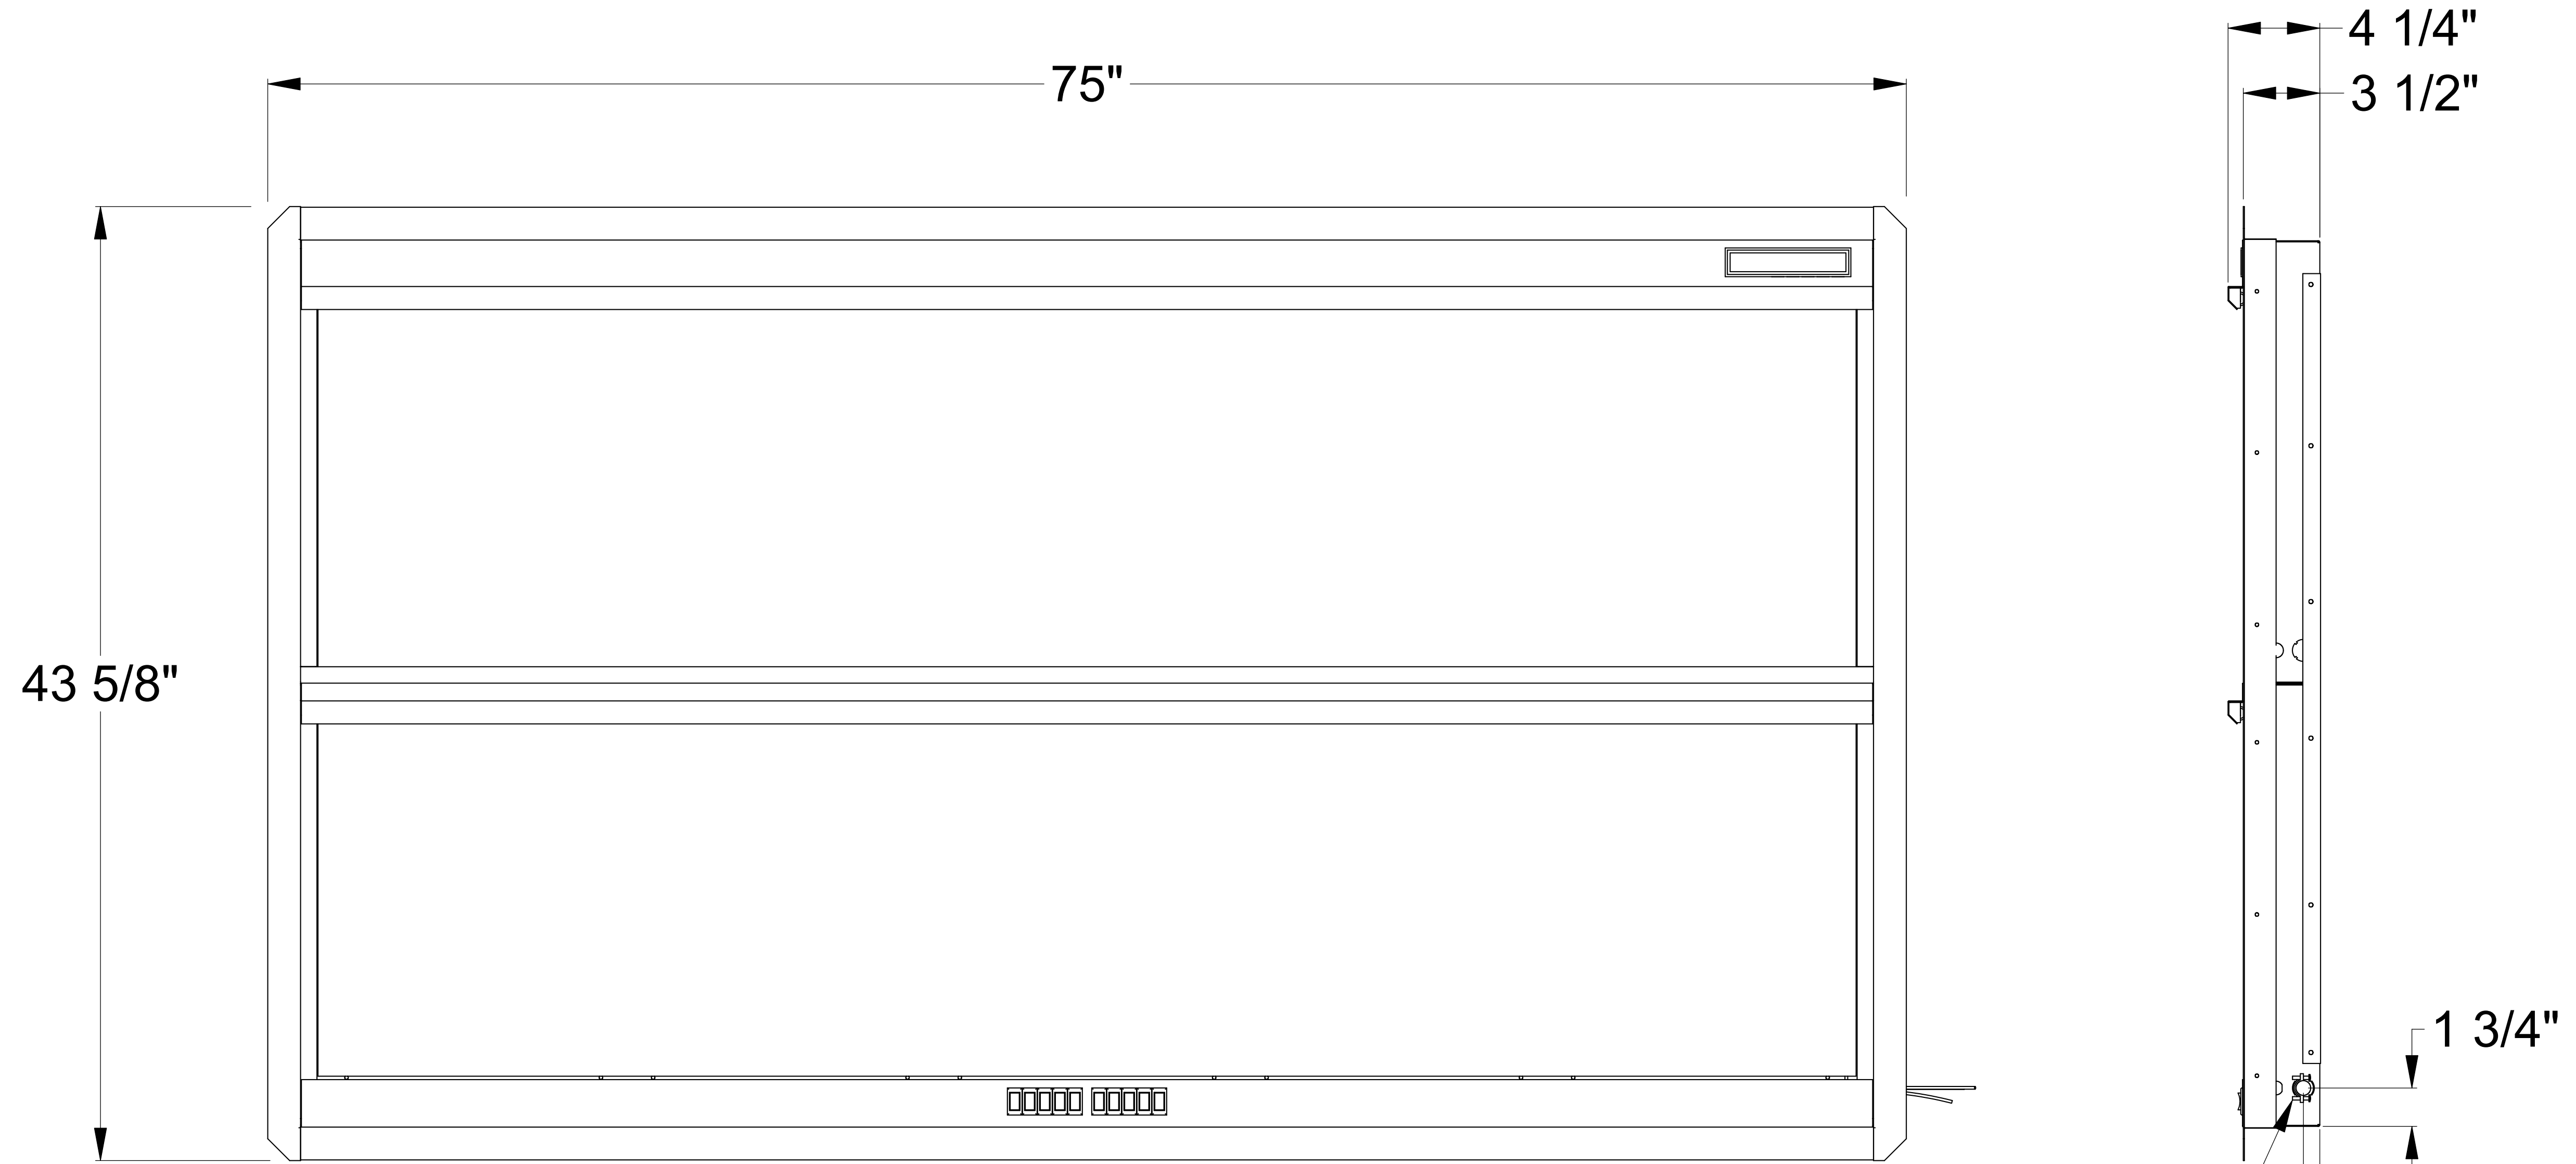

Electrical Requirements: 120VAC, 60 Hertz, Single Phase
Power Rating: 12A
Rough Opening Dimensions: 41 1/4" x 72 3/4"

 **UL** us UL/CUL Approved
LISTED

STANDARD LOCATION
FOR HARDWIRE