



2 Tier, 6 Bank Recessed Units (2066R thru 4066R Series)

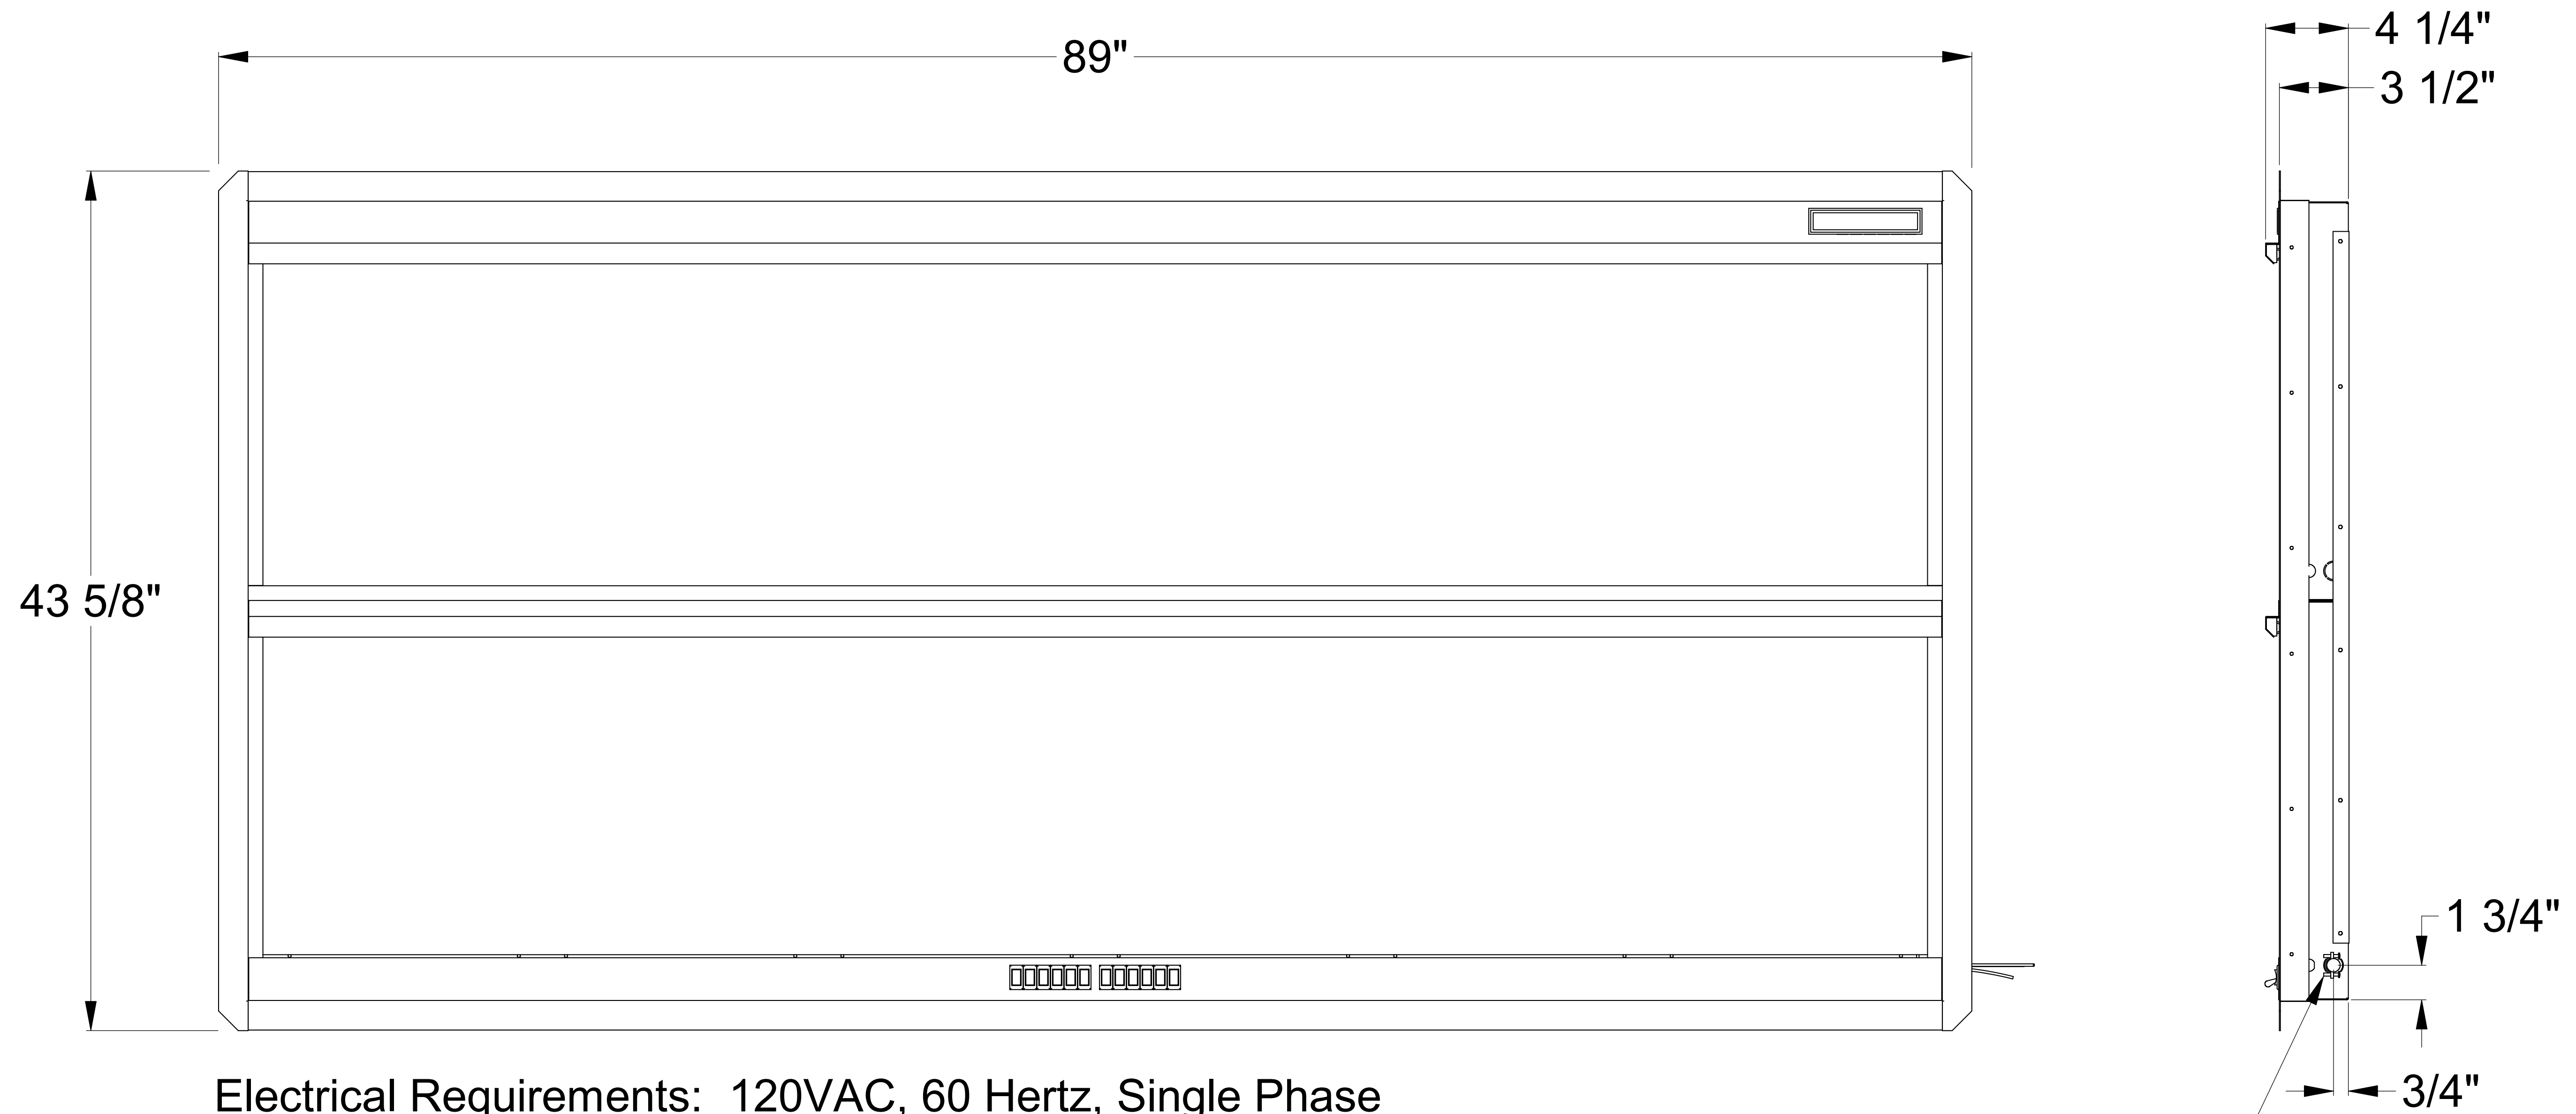

Electrical Requirements: 120VAC, 60 Hertz, Single Phase
Power Rating: 14.4A
Rough Opening Dimensions: 41 1/4" x 86 3/4"

 **UL** us LISTED UL/CUL Approved

STANDARD LOCATION
FOR HARDWIRE